

# Gewindestifte

mit Innensechskant


## Stavacia skrutka

s vnútorným šesťhranom


DIN

915

916

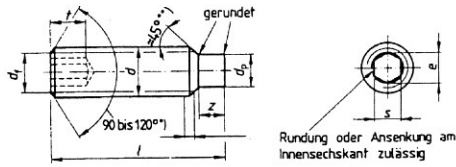

915 - MIT ZAPFEN

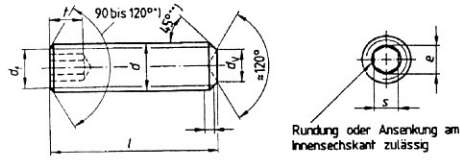

916 - MIT RINGSCHNEIDE

	45H	
	FESTIGKEIT	
	OBERFLÄCHE	
	blank	

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20	M 24
df	Kerndurchmesser - Kleinmaß											
dp	1	1,5	2	2,5	3,5	4	5,5	7	8,5	12	15	18
e	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43	13,72
s	0,9	1,3	1,5	2	2,5	3	4	5	6	8	10	12

l												
3	LG		LG									
4	LG	LG	LG	LG	LG	LG						
5	LG	LG	LG	LG	LG	LG						
6	LG	LG	LG	LG	LG	LG	LG	LG				
8	LG	LG	LG	LG	LG	LG	LG	LG				
10	LG	LG	LG	LG	LG	LG	LG	LG	LG			
12			LG	LG	LG	LG	LG	LG	LG			
16		LG	LG	LG	LG	LG	LG	LG	LG	LG		
20			LG	LG	LG	LG	LG	LG	LG	LG	LG	
25			LG	LG	LG	LG	LG	LG	LG	LG	LG	LG
30			LG	LG	LG	LG	LG	LG	LG	LG	LG	LG
35				LG	LG	LG	LG	LG	LG	LG	LG	LG
40				LG	LG	LG	LG	LG	LG	LG	LG	LG
45				LG	LG	LG	LG	LG	LG	LG	LG	LG
50				LG	LG	LG	LG	LG	LG	LG	LG	LG
60						LG	LG	LG	LG	LG	LG	LG
70						LG	LG	LG	LG	LG	LG	LG
80							LG	LG	LG	LG	LG	LG
90								LG	LG	LG	LG	LG
100									LG	LG	LG	LG