


Vierkantmutter

Štvorhranná matica

DIN

557

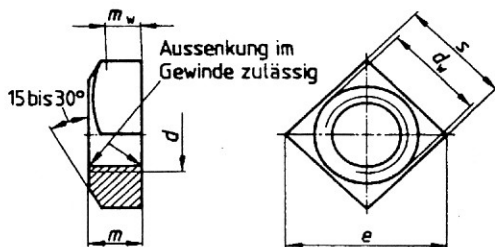

m_w Mindesthöhe für den Schlüsselangriff.

	5	
FESTIGKEIT		
OBERFLÄCHE		
	blank	

<i>d</i>	<i>d_w</i>	<i>e</i>	<i>m</i>	<i>s</i>	<i>blank</i>	<i>verzinkt</i>
M 4	-	9,9	3,2	7	LG	LG
M 5	6,7	11,3	4	8	LG	LG
M 6	8,7	14,1	5	10	LG	LG
M 8	11,5	18,4	6,5	13	LG	LG
M 10	15,5	24	8	17	LG	LG
M 12	17,2	26,9	10	19	LG	LG
M 14	-	29	11	22	LG	LG
M 16	22	33,9	13	24	LG	LG
M 20	27,7	42,4	16	30	LG	LG