

Gewindestifte

mit Innensechskant


Stavacia skrutka

s vnútorným šesťhranom


DIN

913

914

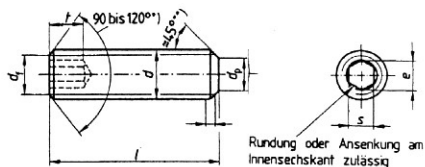

913 - MIT KEGELKUPPE

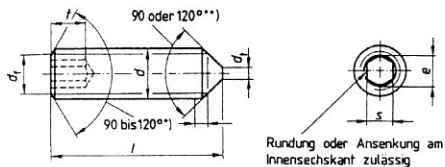

914 - MIT SPITZE

45H
FESTIGKEIT
OBERFLÄCHE
blank

d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20	M 24
df	Kerndurchmesser - Kleinstmaß									
dp	2	2,5	3,5	4	5,5	7	8,5	12	15	18
e	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43	13,72
s	1,5	2	2,5	3	4	5	6	8	10	12

l										
3	LG									
4	LG	LG	LG	LG						
5	LG	LG	LG	LG						
6	LG	LG	LG	LG	LG	LG				
8	LG	LG	LG	LG	LG	LG				
10	LG	LG	LG	LG	LG	LG	LG			
12	LG	LG	LG	LG	LG	LG	LG			
16	LG	LG	LG	LG	LG	LG	LG	LG	LG	
20	LG	LG	LG	LG	LG	LG	LG	LG	LG	
25	LG	LG	LG	LG	LG	LG	LG	LG	LG	LG
30	LG	LG	LG	LG	LG	LG	LG	LG	LG	LG
35		LG	LG	LG	LG	LG	LG	LG	LG	LG
40		LG	LG	LG	LG	LG	LG	LG	LG	LG
45		LG	LG	LG	LG	LG	LG	LG	LG	LG
50		LG	LG	LG	LG	LG	LG	LG	LG	LG
60				LG	LG	LG	LG	LG	LG	LG
70				LG	LG	LG	LG	LG	LG	LG
80				LG	LG	LG	LG	LG	LG	LG
90					LG	LG	LG	LG	LG	
100					LG	LG	LG	LG	LG	