

Senkschrauben


mit Kreuzschlitz Form "H"

Skrutka so zapustenou hlavou

s krížovou drážkou "H"

DIN

965

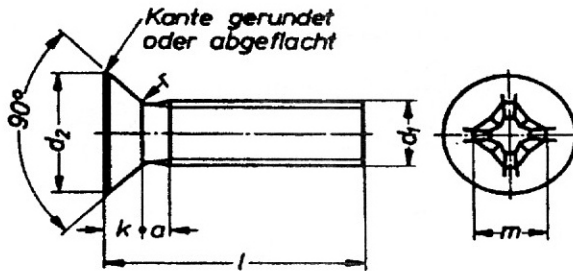

	4.8	
	FESTIGKEIT	
	OBERFLÄCHE	
	verz.	

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10
a	0,8	0,9	1	1,4	1,6	2	2,5	3
dk	3,8	4,7	5,6	7,5	9,2	11	14,5	18
k	1,2	1,5	1,65	2,2	2,5	3	4	5
m	2,35	2,7	2,9	4,4	4,6	6,6	8,7	9,6

l								
4	LG	LG	LG					
5	LG	LG	LG	LG				
6	LG	LG	LG	LG				
8	LG	LG	LG	LG	LG	LG		
10	LG	LG	LG	LG	LG	LG	LG	
12	LG	LG	LG	LG	LG	LG	LG	
14			LG	LG	LG	LG	LG	
16		LG	LG	LG	LG	LG	LG	LG
20		LG	LG	LG	LG	LG	LG	LG
25		LG	LG	LG	LG	LG	LG	LG
30			LG	LG	LG	LG	LG	LG
35			LG	LG	LG	LG	LG	LG
40			LG	LG	LG	LG	LG	LG
45			LG	LG	LG	LG	LG	LG
50			LG	LG	LG	LG	LG	LG
55				LG	LG	LG	LG	LG
60				LG	LG	LG	LG	LG
65					LG	LG	LG	
70				LG	LG	LG	LG	LG
80				LG	LG	LG	LG	LG
90					LG	LG	LG	LG
100					LG	LG	LG	